
VACU-STACK® SPECIFICATIONS

Vacu-Stack Model VSS-TDW WITH SCREEN

Application: For double wall or triple wall round, air cooled chimneys. This is the premier cap for solving common wind-related chimney draft problems caused by conditions such as hills and mountains in the vicinity, tall trees near the chimney, or tall buildings nearby.

Standard Materials: 100% austenitic stainless steel, stainless steel screen.

Alternate materials: Copper (Model VSC-TDW) and Type 316 stainless steel (Model VSM-TDW) for marine environments.

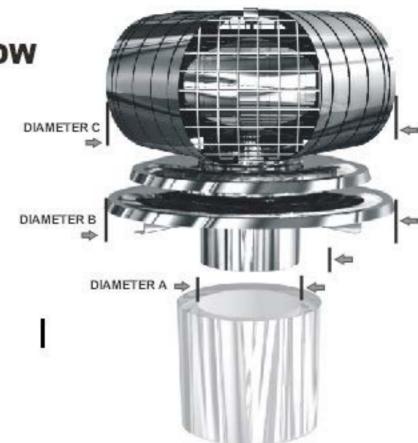

MODEL # (1" SCREEN OPENING*)	MODEL # (1/2" SCREEN OPENING*)	DIAMETERS (INCHES)			SHIPPING
		A `	В	C .	(POUNDS)
VSS-6-TDW-S	VSS-6-TDW-S5	6	16	14	8.5
VSS-7-TDW-S	VSS-7-TDW-S5	7	16	15	8.5
VSS-8-TDW-S	VSS-8-TDW-S5	8	16	18	11
VSS-9-TDW-S	VSS-9-TDW-S5	9	16	20	11
VSS-9.5-TDW-S	VSS-9.5-TDW-S5	9.5	16	20	11
VSS-10-TDW-S	VSS-10-TDW-S5	10	16	21	15
VSS-11-TDW-S	VSS-11-TDW-S5	11	19	23	19
VSS-11.5-TDW-S	VSS-11.5-TDW-S5	11.5	19	24	19
VSS-12-TDW-S	VSS-12-TDW-S5	12	19	24	19
VSS-13-TDW-S	VSS-13-TDW-S5	13	19	28	45
VSS-14-TDW-S	VSS-14-TDW-S5	14	19	30	45

SIZES: Custom sizes available up to 48". Call for price and specific requirements.

CHIMNEY TYPES: Double wall or triple wall round, air cooled.

SCREENS: Available as noted above in 1" and 1/2" mesh openings. Check local regulations for what is required in your area.

OVERSIZE: Oversize lids and bases available. Call us to discuss pricing and specific requirements.



^{*} Nominal dimension